

Device Controller IP for USB 3.1

Overview

As the Universal Serial Bus (USB) standard continues to be the common connectivity solution for both established and new, emerging types of consumer devices, the need for a robust and industry proven USB IP from a trusted provider is spreading to new markets and applications.

Certified for compliance with the USB 3.1 specification, Revision 1.0, the Cadence® Device Controller IP for USB 3.1 leverages deployment in numerous applications and offers to customers reliable and competitive product for all peripheral devices that make use of a USB connection.

The target applications for the Cadence USB Device Controller IP include thumb drives, SSDs, HD video cameras, and other PC peripherals. Thanks to configurable system interface and endpoint space, the controller can be customized to fit single or multiple applications within an SoC.

The Device Controller IP can be delivered with either a low-level or GPL Linux driver to ease integration into the target application. When integrated with the Cadence PHY IP for USB 3.1 Type-C, the Device Controller IP provides a complete solution for the next generation of USB applications.

Product Details

The following sections describe the major blocks and functions of the Device Controller IP.

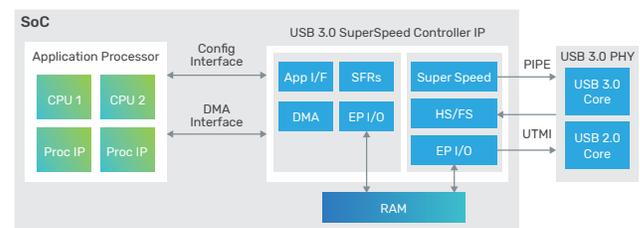


Figure 1: Example system-level block diagram

Benefits

- ▶ Complete hardware and software solution—less time spent on application development
- ▶ Power and clock gating enable substantial power savings
- ▶ Industry-standard interfaces—simple system integration

SuperSpeedPlus Controller

The SuperSpeedPlus controller implements the USB 3.1 protocol for peripheral devices. Functions are distributed among link layer and protocol layer modules, which allows the Device Controller IP to reach maximum transfer speeds close to the theoretical maximum value.

Key Features

- ▶ Supports SuperSpeedPlus (10Gbps), SuperSpeed (5Gbps), High-Speed (480Mbps), and Full-Speed (12Mbps) operation
- ▶ DMA Engine with 128-bit Arm® AMBA® AXI initiator interface
- ▶ Compatible with the Cadence PHY IP for USB 3.1
- ▶ 32-bit APB responder interface
- ▶ EPO + 3IN/OUT endpoints configuration
- ▶ Compliance proven with successful USB-IF certification
- ▶ Configurable PIPE 3.2 (SuperSpeed/SuperSpeedPlus) and UTMI (High-Speed and Full-Speed) PHY interface
- ▶ Full Link Power Management (U0, U1, U2, and U3) with LFPS support
- ▶ Clock gating support
- ▶ Supports all types of USB transfers

AXI Master Interface

The AXI Master Interface is designed to integrate to an application specific memory controller for providing operational data to the Cadence USB 3.1 controller. This interface is used to gain access to application memory. DMA is used to access data structures and related information during normal operation.

APB4 Slave Interface

The APB Controller interface allows for S/W programmability of the Cadence USB 3.1 controller. It provides control and operation status information to the driver software.

System Power Management Interface

When the application desires to employ Power Management, these signals provide an interface to the System Clock Controller to enable dynamic power saving states.

Interrupt Interface

This interface provides interrupt signals to the external CPU for various events detected within the Cadence USB 3.1, including Peripheral-defined interrupts.

MSI Interface is included in the Cadence USB 3.1 to support application interrupts. If enabled, the core will generate 32-bit write operation at AXI Master Interface instead of using interrupt lines. The address and value of the write is controlled by xHCI Extended Message Interrupt Capability.

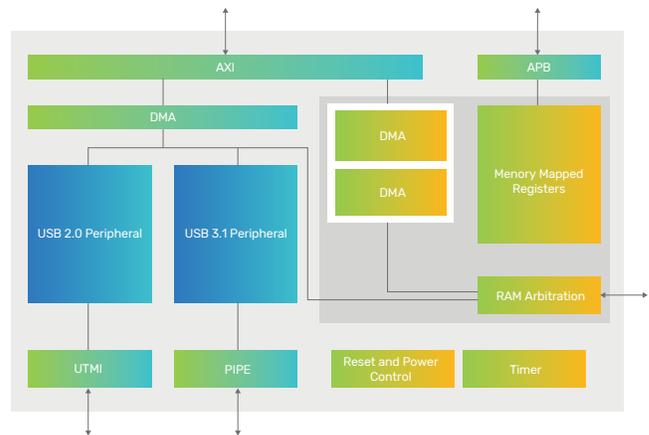


Figure 2: IP-level block diagram

On-Chip Memory Interface

SPRAM memory modules are used to store information about Slot/EP state and as a scratchpad memory for the Cadence USB 3.1. DPRAM memory is used for USB transfers buffering and clock domains synchronization.

Availability

The Device Controller IP is available with the configurations below and supports the following protocols:

Protocol	Speed
USB 3.1	10Gbps/5Gbps
USB 2.0	480Mbps

Related Products

- ▶ Verification IP for USB Protocols
- ▶ PHY IP for USB 3.1
- ▶ PHY IP for USB 3.1 Type-C Related Products

Deliverables

- ▶ Synthesizable RTL
- ▶ Testbench
- ▶ Synthesis and simulation support files
- ▶ Documentation

For more information, visit ip.cadence.com.



Cadence is a pivotal leader in electronic design and computational expertise, using its Intelligent System Design strategy to turn design concepts into reality. Cadence customers are the world's most creative and innovative companies, delivering extraordinary electronic products from chips to boards to systems for the most dynamic market applications. www.cadence.com

© 2021 Cadence Design Systems, Inc. All rights reserved worldwide. Cadence, the Cadence logo, and the other Cadence marks found at www.cadence.com/go/trademarks are trademarks or registered trademarks of Cadence Design Systems, Inc. Arm and AMBA are registered trademarks or trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere. PCI Express and PCIe are registered trademarks or trademarks of PCI-SIG. All other trademarks are the property of their respective owners. 31583 10/21 SA / VY / PDF

